



# Developer Program

June 2026

# AJA | Developer Program

**3** YEAR  
WARRANTY



## Working Together

AJA's Developer program allows partner companies to incorporate AJA products into their systems. By utilizing existing, proven video I/O devices, partners leverage AJA's expertise to develop and support these technologies, saving money and getting their integrated products to market more quickly.

AJA technology is at the core of many great products. Superior quality and a straightforward development kit make AJA's Developer products easy to integrate into any Windows, macOS, or Linux environment.

AJA has a long history of building high quality, reliable video technologies for demanding professional environments. The AJA Developer Program gives you access to that proven engineering pedigree for integration into your own products and systems.

Many of AJA's retail products are available for developer use. Whether you need to incorporate conversion technology into a prebuilt package using one of our full range of Mini-Converters, or integrate a KONA video I/O card into a custom setup, you have access to all the power and quality of AJA.

For more specific applications, the Corvid family of products uses the same technology as the retail cards but provides alternate form factors that allow you to further customize your configuration.

From single channel I/O to multiple simultaneous I/O streams, multichannel HDMI capture, optical fiber, HDR, and 12G-SDI I/O, there's a Developer product to fit every need.

AJA's comprehensive SDK and development tools will help you integrate into any environment with support for Windows®, macOS®, and Linux®. As a developer partner, you will have direct access to AJA's technical support team, which is known throughout the industry for fast and effective response.




# AJA | Developer Program

**3** YEAR WARRANTY

Learn More: [www.aja.com/category/developer](http://www.aja.com/category/developer)

Apply Today: [www.aja.com/developer/request](http://www.aja.com/developer/request)



[View Online](#)

Other models available: Corvid 88 Fanless, Corvid 88 Low Profile, and Corvid 88 Fanless Low Profile

## Corvid 88

High Density Multi-Stream, Multi-Format I/O

- 4K/UltraHD/2K/HD/SD up to dual 4K 50/60p
- 8x bidirectional 3G-SDI connections with 16-Ch embedded audio per connection, up to a total of 64-Ch/32-Ch support
- RGB 4:4:4 12-bit, YCbCr 4:2:2 10-bit and HFR support
- 4x independent Mixer/Keyer widgets
- 8x independent 16-Ch 48 kHz SDI embedded audio I/O engines
- VPID signaling for SDR/HDR Transfer Characteristics, Colorimetry, and Luminance via SDI
- PQ, HLG, and Dolby Vision Support
- HDR Metadata Capture and Auto Playback Detection
- Reference/LTC Input on card (Analog black burst or Tri-level)
- Full height and half height models
- RS-422 on internal header or bracket with full height model
- LTC input on internal header
- Includes support for Apple silicon



[View Online](#)

Other models available: Corvid 44 12G Fanless, Corvid 44 12G Low Profile, and Corvid 44-12G BNC

## Corvid 44 12G

Compact 12G-SDI Power

- 8K/UltraHD2/4K/UltraHD/2K/HD/SD, including multi-channel 4K up to 50/60p
- 4x bidirectional 12G-SDI HD-BNC connections with 16-Ch embedded audio per connection for a total of 64-Ch/32-Ch support for 8K workflows
- RGB 4:4:4 12-bit (4K/UltraHD) and YCbCr 4:2:2 10-bit HFR support
- Up to 12-bit LUT support (.cube)
- Dynamic FPGA Firmware Reconfiguration
- VPID signaling for SDR/HDR Transfer Characteristics, Colorimetry, and Luminance via SDI
- PQ, HLG, and Dolby Vision Support
- Reference/LTC Input on card (Analog black burst or Tri-level)
- Full height and half height models
- RS-422 on internal header or bracket with full height model
- LTC input on internal header
- Active or passive heatsink
- Includes support for Apple silicon




[View Online](#)

Other models available: Corvid 44 12G Fanless, Corvid 44 12G Low Profile, and Corvid 44 12G BNC

## Corvid 44 12G BNC

Compact 12G-SDI Power

- 8K/UltraHD2/4K/UltraHD/2K/HD/SD, including multi-channel 4K up to 50/60p
- 4x full-size bidirectional 12G-SDI connections with 16-Ch embedded audio per connection for a total of 64-Ch/32-Ch support for 8K workflows
- RGB 4:4:4 12-bit and YCbCr 4:2:2 10-bit HFR workflows supported
- Dynamic FPGA Firmware Reconfiguration
- VPID signaling for SDR/HDR Transfer Characteristics, Colorimetry, and Luminance via SDI
- PQ, HLG, and Dolby Vision Support
- HDR Metadata Capture and Auto Playback Detection
- Ref/LTC input on internal header (Analog black burst or Tri-level), RS-422 on internal header
- Active or passive heatsink
- Includes support for Apple silicon



[View Online](#)

Other models available: Corvid 44 Fanless, Corvid 44 Low Profile, and Corvid 44 Fanless Low Profile

## Corvid 44

Flexible Multi-Format I/O


- 4K/UltraHD/2K/HD/SD up to 50/60p
- 4x bidirectional 3G-SDI connections with 16-Ch embedded audio per connection, up to a total of 64-Ch/32-Ch support
- RGB 4:4:4 12-bit and YCbCr 4:2:2 10-bit HFR support
- 2x independent Mixer/Keyer widgets
- 4x independent 16-Ch 48 kHz SDI embedded audio I/O engines
- VPID signaling for SDR/HDR Transfer Characteristics, Colorimetry, and Luminance via SDI
- PQ, HLG, and Dolby Vision Support
- HDR Metadata Capture and Auto Playback Detection
- Reference/LTC Input on card (Analog black burst or Tri-level)
- Full height and half height models
- RS-422 on internal header or bracket with full height model
- LTC input on internal header
- Includes support for Apple silicon

# AJA | Developer Program

**3** YEAR  
WARRANTY

Learn More: [www.aja.com/category/developer](http://www.aja.com/category/developer)

Apply Today: [www.aja.com/developer/request](http://www.aja.com/developer/request)

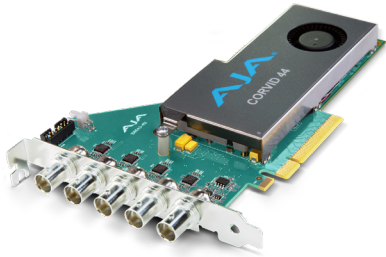

[View Online](#)

## Corvid 44 BNC

Flexible Multi-Format I/O

- 4K/UltraHD/2K/HD/SD up to 50/60p
- 4x full-size bidirectional 3G-SDI connections with 16-Ch embedded audio per connection, up to a total of 64-Ch/32-Ch support
- RGB 4:4:4 12-bit and YCbCr 4:2:2 10-bit HFR workflows supported
- 2x independent Mixer/Keyer widgets
- 4x independent 16-Ch 48 kHz SDI embedded audio I/O engines
- VPID signaling for SDR/HDR Transfer Characteristics, Colorimetry, and Luminance via SDI
- PQ, HLG, and Dolby Vision Support
- HDR Metadata Capture and Auto Playback Detection
- Ref/LTC input on internal header (Analog black burst or Tri-level)
- RS-422 on internal header
- Includes support for Apple silicon

# AJA | Developer Program

**3** YEAR  
WARRANTY

Learn More: [www.aja.com/category/developer](http://www.aja.com/category/developer)

Apply Today: [www.aja.com/developer/request](http://www.aja.com/developer/request)



[View Online](#)

## KONA IP25

SMPTE ST 2110 Uncompressed IP I/O

- ST 2110-20 Video, ST 2110-30 Audio, and ST 2110-40 Ancillary, with ST 2022-7 redundancy
- Video and Ancillary support up to 4 Rx and 4 Tx each
- 10-bit 4:2:2 up to 4096x2160p
- 12-bit 4:4:4 up to 4096x2160p
- Video + Key Playback
- SDR/HDR support for Transfer Characteristics, Colorimetry, and Luminance via SDP file
- Audio support up to 16 Rx and 16 Tx with up to 4 streams per video
- Up to 16 audio channels per ST 2110-30 stream via 1ms and 125us timing
- ST 2059-2 (PTPv2) accessed only via media network SFPs
- LLDP (Link Layer Description Protocol)
- DNS-SD (service discovery) and MNDS (Multicast DNS)
- In-Band (SFP) and Out-of-Band (RJ-45) control via NMOS and AJA API
- Single slot PCIe 4.0, 8 lane, full height
- 2x SFP cages support 10GigE or 25GigE SFPs (SFPs not included)
- FEC 74 and 108 support for 25GigE SFPs
- macOS, Windows, and Linux support

## KONA X

Next Generation Low Latency Video I/O

- 4K/UltraHD/2K/HD/SD capture and playback, up to 60p
- Ultra-Low Latency: Sub-frame delay on processed video output
- 2x bidirectional 12G-SDI connections with 16-Ch embedded audio
- HDMI 2.0 input and output, with VESA support with agnostic subsystems video timing
- RGB 4:4:4 12-bit and YCbCr 4:2:2 10-bit support
- Windows, macOS, and Linux support for OEM applications via the AJA SDK
- In Firmware Microcontroller
- Supports graphics up to 4K/UltraHD with alpha channel
- VPID signaling for SDR/HDR Transfer Characteristics, Colorimetry, and Luminance via SDI
- HLG and HDR10 HDR support via HDMI
- Audio accessed through the AJA SDK
- Optional KONA Xpand board available for expanded connectivity



[View Online](#)

Other models available:  
KONA X Fanless



[View Online](#)

Other models available:  
KONA XM Fanless

## KONA XM

Video I/O for AI/AR Medical Devices

- 4K/UltraHD/2K/HD/SD capture and playback, up to 60p
- Ultra-Low Latency: Minimal delay on processed video output
- 2x unidirectional 12G-SDI connections with 16-Ch embedded audio
- HDMI 2.0 input and output, with VESA support for select HDMI resolutions with agnostic subsystems video timing
- RGB 4:4:4 12-bit and YCbCr 4:2:2 10-bit support
- Windows and Linux support for OEM applications via the AJA SDK
- In Firmware Microcontroller
- Supports graphics up to 4K/UltraHD with alpha channel
- VPID signaling for SDR/HDR Transfer Characteristics, Colorimetry, and Luminance via SDI
- HLG and HDR10 HDR support via HDMI
- Audio accessed through the AJA SDK
- Available in active and passive cooling options

## KONA 5

Ultimate Performance

- 8K/UltraHD2/4K/UltraHD/2K/HD/SD up to 50/60p
- 4x bidirectional 12G-SDI connections with 16-Ch embedded audio per connection for a total of 64-Ch/32-Ch support for 8K workflows
- HDMI 2.0 output, 4K/UltraHD HFR, plus 8K to 4K downsampling
- RGB 4:4:4 12-bit, and YCbCr 4:2:2 10-bit HFR workflows supported
- 8K support for leading editing systems, 8K or multi-channel 4K support for OEM applications with AJA SDK
- Dynamic FPGA Firmware Reconfiguration
- 4K Closed Captioning support
- PQ, HLG, HDR10, and Dolby Vision Support
- HDR Metadata Capture and Auto Playback Detection
- Includes support for Apple silicon
- Reference Input on card (Analog black burst or Tri-level)
- Included breakout cable for LTC, RS-422, 8-Ch AES/EBU



[View Online](#)

Connectivity on KONA 5 Breakout Cable



# AJA | Developer Program

**3** YEAR  
WARRANTY

Learn More: [www.aja.com/category/developer](http://www.aja.com/category/developer)

Apply Today: [www.aja.com/developer/request](http://www.aja.com/developer/request)




[View Online](#)

## KONA 4

Powerful HFR Capabilities up to 4K 50/60p

- 4K/UltraHD/2K/HD/SD up to 50/60p
- 4x bidirectional 3G-SDI connections with 16-Ch embedded audio
- HDMI v1.4b monitoring with 8-Ch embedded audio, plus 4K to HD downsampling
- RGB 4:4:4 12-bit, and YCbCr 4:2:2 10-bit HFR support
- Real time up, down, cross-conversion (HD/SD)
- 4K Closed Captioning support
- VPID signaling for SDR/HDR Transfer Characteristics, Colorimetry, and Luminance via SDI
- PQ, HLG, and Dolby Vision Support
- HDR Metadata Capture and Auto Playback Detection
- Compatible with leading creative apps
- Includes support for Apple silicon
- Included breakout cable for Ref (Analog or Tri-level), LTC
- RS-422, 8-Ch AES/EBU
- Extend external connectivity with K3G-BOX breakout box



[View Online](#)

Other models available:  
KONA 1 Low Profile

## KONA 1

Powerful and Cost Effective 3G-SDI I/O

- 2K/HD/SD up to 50/60p
- 2x 3G-SDI connections (In, Out) with 16-Ch embedded audio
- RGB 4:4:4 12-bit and YCbCr 4:2:2 10-bit HFR workflows supported
- VPID signaling for SDR/HDR Transfer Characteristics, Colorimetry, and Luminance via SDI
- PQ, HLG, and Dolby Vision Support
- HDR Metadata Capture and Auto Playback Detection
- RS-422 support on 9-pin external connector
- Low profile form factor also available with internal RS-422 header
- Reference/LTC Input on card (Analog black burst or Tri-level)
- Compatible with leading creative apps
- Includes support for Apple silicon




[View Online](#)

## KONA HDMI

HDMI Capture for Multi-Channel 2K/HD or Dual Channel 4K/UltraHD

- 4K/UltraHD/2K/HD/SD up to 50/60p
- 4x full-size HDMI inputs, each with 8-Ch embedded audio
- Simultaneous capture of 2x 4K/UltraHD or 4x 2K/HD
- HDMI 2.0 (port 1 & 2) and HDMI 1.4b (ports 3 & 4)
- RGB 4:4:4 12-bit and YCbCr 4:2:2 10-bit HFR support
- Capture stunning HDR from cameras, game consoles, and more
- PQ, HLG, HDR10, and Dolby Vision Support
- HDR Metadata Capture
- Video4Linux (V4L2 Color) and DirectShow support
- Compatible with leading creative apps
- Includes support for Apple silicon



[View Online](#)

## KONA LHe Plus

HD/SD Analog and Digital Capture and Output

- HD-SDI and SD-SDI up to 1080 30p / 720 60p
- 3x 1.5G-SDI connections (1x In, 2x Out) with 8-Ch embedded audio
- YCbCr 4:2:2 10-bit workflows supported
- Real time HD to SD down-conversion with pristine 10-bit quality
- Compatible with leading creative apps
- Includes support for Apple silicon
- Included breakout cable for Ref (Analog Color Black or Composite Sync), RS-422, 2-Ch AES/EBU, Analog composite or S-video, or SD/HD component, 2-Ch analog audio I/O
- Extend external connectivity with KL-BOX-LH breakout box



Optional Breakout Box:  
Utilize the KL-BOX-LH Breakout Box to easily integrate KONA LHe Plus into rackmount environments.

# AJA | Developer Program

**3** YEAR  
WARRANTY

Learn More: [www.aja.com/category/developer](http://www.aja.com/category/developer)

Apply Today: [www.aja.com/developer/request](http://www.aja.com/developer/request)



[View Online](#)

## Io X3

Thunderbolt Performance from 2K/HD to SD

- 2K/HD/SD I/O up to 50/60p
- 4x bidirectional 3G-SDI BNC with 16-Ch embedded audio
- HDMI I/O with 8-Ch embedded audio
- Two Thunderbolt ports with loop through
- Multi-channel workflow support for OBS/Wirecast/vMix and other applications
- RGB 4:4:4 12-bit up to p30, YCbCr 4:2:2 10-bit and HFR workflows supported
- VPID signaling for SDR/HDR Transfer Characteristics, Colorimetry, and Luminance via SDI
- PQ, HLG, HDR10, and Dolby Vision® Support
- HDR Metadata Capture and Auto Playback Detection
- Multiview output over HDMI to view up to 4-Ch on one screen
- 8-Ch Analog audio support via Tascam connection
- Front panel audio display
- Includes support for Apple silicon
- RS-422 VTR control, Reference, LTC Input and LTC Output



[View Online](#)

## Io 4K Plus

Thunderbolt Performance from 4K to SD

- 4K/UltraHD/2K/HD/SD 10-bit I/O up to 50/60p
- 4K/UltraHD HDMI 2.0 I/O with 8-Ch embedded audio
- 4x SDI BNC ports and configuration options
  - Four HD/SD 3G/1.5G bidirectional
  - One 4K/UltraHD single link 12G/6G input (SDI 1) and one 4K/UltraHD single link 12G/6G output (SDI 3)
  - Two 4K/UltraHD dual link 3G/1.5G (one input channel & one output channel, two input channels, or two output channels)
  - One 4K/UltraHD four link 3G/1.5G input or output, Quadrant or 2SI
- Dedicated SDI HD/SD Monitor Output
  - 4K video is down-converted to 2K and UltraHD is down-converted to HD
- Two Thunderbolt ports with loop through
- RGB 4:4:4 12-bit, YCbCr 4:2:2 10-bit and HFR workflows supported
- 12-bit and 10-bit LUT support (.cube)
- 4K Closed Captioning support
- VPID signaling for SDR/HDR Transfer Characteristics, Colorimetry and Luminance via SDI
- PQ, HLG, HDR10, and Dolby Vision® support
- HDR Metadata Capture and Auto Playback Detection
- Analog Audio flexibility with a choice of 8-Ch In or 8-Ch Out or 4-Ch In and 4-Ch Out
- Includes support for the Apple silicon chips
- Compatible with OBS Studio, vMix, Telestream Wirecast, Adobe Creative Suite, Apple Final Cut Pro, Avid Media Composer, and much more
- XLR 12V power for battery or AC use
- Headphone jack and level control for mobile and live environments
- RS-422 VTR control, Reference, LTC Input



[View Online](#)

## T-TAP Pro

Compact, silent, mobile 4K HDR with SDI and HDMI

- 4K/UltraHD/2K/HD/SD Output/Monitoring up to 50/60p
- 1x 12G-SDI BNC with 16-Ch embedded audio
- 1x HDMI 2.0 with 8-Ch embedded audio
- 1x Thunderbolt connector
- Compact, silent, mobile form factor with front panel Audio Levels Reference Display
- RGB 4:4:4 12-bit, YCbCr 4:2:2 10-bit and HFR workflows supported
- 12-bit and 10-bit LUT support (.cube)
- VPID signaling for SDR/HDR Transfer Characteristics, Colorimetry, and Luminance via SDI
- PQ, HLG, and Dolby Vision Support
- HDR Metadata Auto Playback Detection
- Headphone jack and quick access audio level control for mobile environment

# AJA | Developer Program

**2** YEAR  
WARRANTY

Learn More: [www.aja.com/category/developer](http://www.aja.com/category/developer)

Apply Today: [www.aja.com/developer/request](http://www.aja.com/developer/request)



[View Online](#)

## Io Xpand

NEW

### Thunderbolt 5 to PCIe Card Expansion System

- Up to 6000 MB/s of bi-directional Thunderbolt 5 performance to the installed PCIe card
- Supports KONA and Corvid PCIe cards\*
- Supports full height, 1/2 length, x4 Gen 4 PCIe cards
- Supports double-width PCIe cards and PCIe cards with daughter cards
- 6 pin auxiliary power connector and cable for cards requiring additional power
- Compatible with PCIe 4.0, 3.0, 2.0, and 1.1 cards
- Nearly silent operation via temperature-controlled fan
- Thunderbolt 5, 4, 3 and USB4 compatible
- Includes Thunderbolt 5 cable and securing bracket
- Thunderbolt daisy-chain via second Thunderbolt port
- Lightweight and rugged aluminum enclosure
- Windows, macOS, and Linux compatible

\*Corvid products are designed for developers, so some Desktop software features may not be available. Please contact AJA support for more information.

## Three Year Warranty

AJA Video warrants that Developer products will be free from defects in materials and workmanship for a period of three years from the date of purchase.

## About AJA Video Systems, Inc.

Since 1993, AJA Video has been a leading manufacturer of video interface and conversion solutions, bringing high quality, cost effective digital video products to the professional, broadcast and postproduction markets.

AJA products are designed and manufactured at our facilities in Grass Valley, California, and sold through an extensive sales channel of resellers and systems integrators around the world. For further information, please see our website at [www.aja.com](http://www.aja.com)

06102026

**AJA Video Systems, Inc.**

Grass Valley, California

[www.aja.com](http://www.aja.com) • [sales@aja.com](mailto:sales@aja.com) • [support@aja.com](mailto:support@aja.com)

